

**ELECTRIC CONTROL TRANSPARENT RESIN PLATE**

**Publication number:** JP2001062952

**Publication date:** 2001-03-13

**Inventor:** TAKAHASHI HIROSHI; SAKAI MASAHIRO

**Applicant:** TAKIRON CO

**Classification:**

- international: **B32B7/02; B32B27/20; B32B7/02; B32B27/20; (IPC1-7): B32B7/02; B32B27/20**

- European:

**Application number:** JP19990245955 19990831


**Priority number(s):** JP19990245955 19990831

**Report a data error here**

**Abstract of JP2001062952**

**PROBLEM TO BE SOLVED:** To provide an electric control transparent resin plate of little unevenness of surface resistivity demonstrating superior electric control properties while transparency and see-through properties are improved by a press.

**SOLUTION:** A pressed electric control transparent resin plate P is provided with a transparent thermoplastic resin electric control layer 2 of 0.05-0.50  $\mu\text{m}$  thickness containing 2-8 wt.% extremely fine long carbon fibers meandering and interlocking one another and formed on a transparent thermoplastic base 1, and the resin plate P is provided with 75% or more total beam transmittance, 5% or less haze and less than 1010  $\Omega$  surface resistivity. Meandering and long carbon fibers of 3.5-100 nm fiber diameter and 5 or more aspect ratio are used.

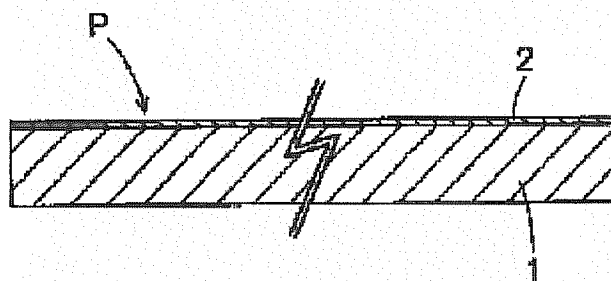

Data supplied from the **esp@cenet** database - Worldwide

## FUNCTIONAL FILM HAVING FUNCTIONAL LAYER AND OBJECT TO WHICH THE FUNCTIONAL LAYER IS IMPARTED

**Publication number:** JP2002347150

**Publication date:** 2002-12-04

**Inventor:** IIJIMA TADAYOSHI

**Applicant:** TDK CORP

**Classification:**

- international: **G02B1/11; B32B5/16; B32B7/06; B44C1/17; G02B1/10; B44C1/17; B32B5/16; B32B7/06; B44C1/17; G02B1/10; B44C1/17; (IPC1-7): B44C1/17; B32B5/16; B32B7/06; G02B1/10; G02B1/11**

- European:

**Application number:** JP20010149451 20010518

**Priority number(s):** JP20010149451 20010518; JP20000148826 20000519; JP20000148827 20000519; JP20000149051 20000519; JP20010013587 20010122; JP20010082787 20010322

[Report a data error here](#)

### Abstract of JP2002347150

**PROBLEM TO BE SOLVED:** To provide a functional film for transfer, which has a functional layer capable of developing various kinds of functions by a method of application, for example, a transparent conductive layer having a low electric resistance value, an object to which the functional layer is imparted, and a method for manufacturing the object.

**SOLUTION:** In this functional film, at least the functional layer 4 peelable from a supporting body 1, which serves as a compressed layer of functional fine particles, is provided on the supporting body 1. The compressed layer can be obtained by compressing a functional fine particle-containing layer formed in such a manner that a liquid, in which the functional fine particles are dispersed, is applied for drying onto the supporting body 1. This functional film is advantageous when the functional layer 4 of a uniform thickness is imparted to the object, such as a plate material, lacking in flexibility.

